
Abysmal Energy Structure Co.Ltd.	Product Data Sheet	System:	
	BS Coupling	Water System	
Model No. : AES-WS-009	Data Sheet No.	Rev:0	Date: 09/13/2014
	AES-DSH-007		Page 1 of 2

BS Coupling is used for quick connection of firefighting devices to the supply hose with full sealing.

کوپلینگ آتشنشانی BS برای اتصال سریع و آب بندی کامل بین تجهیزات مختلف آتشنشانی و شلنگ استفاده می گردد.

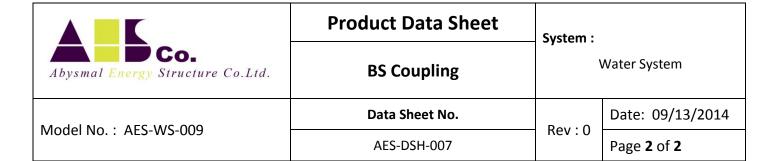

General Information

• **Application**: Fire Water

• Max. Working Pressure: 12 Bar

• Normal Working Pressure: 10 Bar

Test Pressure: 20 Bar

• Design Code : BS 336

• Connection Type : Male And Female

Nominal Size : 2½ "

• Hose Size: 1 ½", 1 ¾", 2 ½", 2 ¾"

Material

• Body (Male And Female): Gunmetal / Brass / Aluminum Alloy

• Release : Gunmetal / Brass / Aluminum Alloy

• Spring: Stainless Steel

Finish

Natural

Installation & Maintenance

- Install Male Part to the one Side of Fire Hose using Steel Wire, Do the Same with Female part for the Other Side of Fire Hose.
- Maintenance: Check the BS Washer for any Damage and Replace with new one each Year.

Reference Data Sheet

• BS Washer (AES-WS-009-01)